
# clicktronie

# HDMI™ TO MICRO HDMI™ ADAPTER CABLE

Smooth images in 4K or Full HD over 1 to 5 metres and many years. The reason: a strong plug, gold-plated connectors and a triple shielded premium cable.

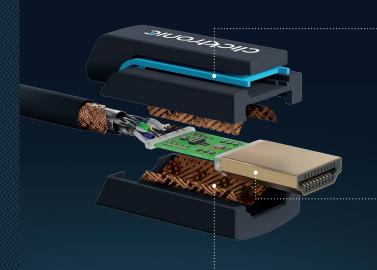

# A PLUG

## THAT PROTECTS AGAINST CABLE BREAKAGE

The plug of the Clicktronic  $HDMI^{\mathbb{M}}$  to Micro  $HDMI^{\mathbb{M}}$  adapter cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

# GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE

To make sure that the connectors remain rust-free, they are coated with 24 Carat gold. This prevents them from oxidising. Plus: unlike many materials, gold is excellent at transmitting signals – for resistance-free transmission, completely without any interruptions.

## TRIPLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the triple shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.

# OFC INNER CONDUCTORS FOR BRILLIANT SIGNAL QUALITY

Pin-sharp images, brilliant audio – even after years: the inner conductors made from 99.9% oxygen-free copper (OFC) are designed not to come into contact with oxygen. This means that they do not oxidise and they transmit signals excellently, just like on the very first day.

# A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic HDMI™ to Micro HDMI™ adapter cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

SUBJECT TO CHANGE. MODEL SIMILAR. HDMI", THE HDMI" LOGO AND HIGH-DEFINITION MULTIMEDIA INTERFACE ARE TRADEMARKS OR REGISTERED TRADEMARKS OF HDMI LICENSING LLC IN THE USA AND OTHER COUNTRIES. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

# clicktronie®



# HDMI™ TO MICRO HDMI™ ADAPTER CABLE



## HIGH RESOLUTION OVER UP TO 5 METRES

Smooth streaming and home cinema experience: The Clicktronic HDMI™ to Micro HDMI™ adapter cable allows you to transmit audio and video signals from a tablet, smartphone or camera to a HD TV, projector, or screen – over 1 to 5 metres and with a resolution of up to 4K ( $3840 \times 2160 \text{ px}$ ) at 30 Hz or Full HD ( $1920 \times 1080 \text{ px}$ ) at 60 Hz. Thanks to G-Sync™ and FreeSync™, this is even the case for games where quick reactions are crucial.



## SEVERAL CHANNELS FOR INCREASE CONVENIENCE

The Audio Return Channel (ARC) transmits and receives digital audio signals simultaneously. The Ethernet Channel (HEC) transmits the Internet signal e.g. from a camera to a TV. And, thanks to Consumer Electronics Control (CEC), the television automatically switches on with the camera and selects the right HDMI™ port. Plus: you can control the camera directly using the TV remote control.



OUTPUT

# ALL ADVANTAGES AT A GLANCE

#### HIGH RESOLUTION

From up to 4K (3840 × 2160 px) at 30 Hz or Full HD (1920 × 1080 px) at 60 Hz

#### MULTIFUNCTIONAL

Thanks to several channels: HEC. ARC. CEC.

#### **BRILLIANT SIGNAL QUALITY**

No oxidation thanks to an inner conductor made from 99.9% oxygen-free copper (OFC).

#### NO FLICKERING

Thanks to triple insulation.

# FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

## STRONG PLUG

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

#### **RUST-FREE CONNECTOR**

Even after years – thanks to a 24 Carat gold coating.

SUBJECT TO CHANGE. MODEL SIMILAR. HDMI", THE HDMI" LOGO AND HIGH-DEFINITION MULTIMEDIA INTERFACE ARE TRADEMARKS OR REGISTERED TRADEMARKS OF HDMI LICENSING LLC IN THE USA AND OTHER COUNTRIES. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

# clicktronie®




# HDMI™ TO MICRO HDMI™ ADAPTER CABLE

# SIGNAL TRANSMISSION

TRANSMISSION TYPES: digital audio and video signals MAX. BANDWIDTH (MHz): 340 (1–5 m) MAX. TRANSMISSION RATE [Gbit/s]: 10.2 (1–5 m) WAVE IMPEDANCE  $\{\Omega\}$ : 100

# CABLE CROSS-SECTION

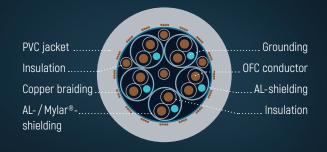

# SUPPORTED FORMATS

AUDIO STANDARDS	Audio Return Channel (ARC), Dolby Digital / Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD-Audio, SA-CD
OTHER STANDARDS	HDMI™ Ethernet Channel (HEC), 3D, HDCP, CEC, Full HD (1080 i / p), HD ready (720 i / p), SDTV (480 i / p)
COLOUR SPACES	HDR, 16/24bit RGB/YUV, Deep Color, x.v.Color™

# **CIRCUIT DIAGRAM**

P1 HDMI™ A		P2 HDMI™ D
1 ———		3
2 ———	$ \mid$ $\times$ $\times$ $\mid$ $\mid$ $-$	4
3 ———		5
4 ———		6
5 ———		7
6 ———		8
7 ———		9
8 ———		10
9 ———		11
10 —		12
11 ———		13
12 ———		14
14		2
17 —		16
19 —		1
13	CEC —	15
15	SCL	17
16	SDA —	18
18 ———	+ 5 V POWER	
CASING —		CASING
0.10.110		6,101116

## PRODUCT DATA

CABLE LENGTH	Ø INNER CONDUCTOR	AWG	Ø OUTER JACKET
1– 5 m	1×0.20 mm	32	5 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
1.0 m	16.99€	1/20/40	70326	4040849703263
2.0 m	19.99€	1/20/40	70328	4040849703287
3.0 m	24.99€	1/15/30	70329	4040849703294
5.0 m	34.99€	1/12/24	70330	4040849703300



SUBJECT TO CHANGE. MODEL SIMILAR. HDMI", THE HDMI" LOGO AND HIGH-DEFINITION MULTIMEDIA INTERFACE ARE TRADEMARKS OR REGISTERED TRADEMARKS OF HDMI LICENSING LLC IN THE USA AND OTHER COUNTRIES. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.