


# VGA CABLE

Smooth images in Full HD or SXGA over 2 to 20 metres and many years. The reason: a strong plug, gold-plated connectors and a flexible triple shielded premium cable.

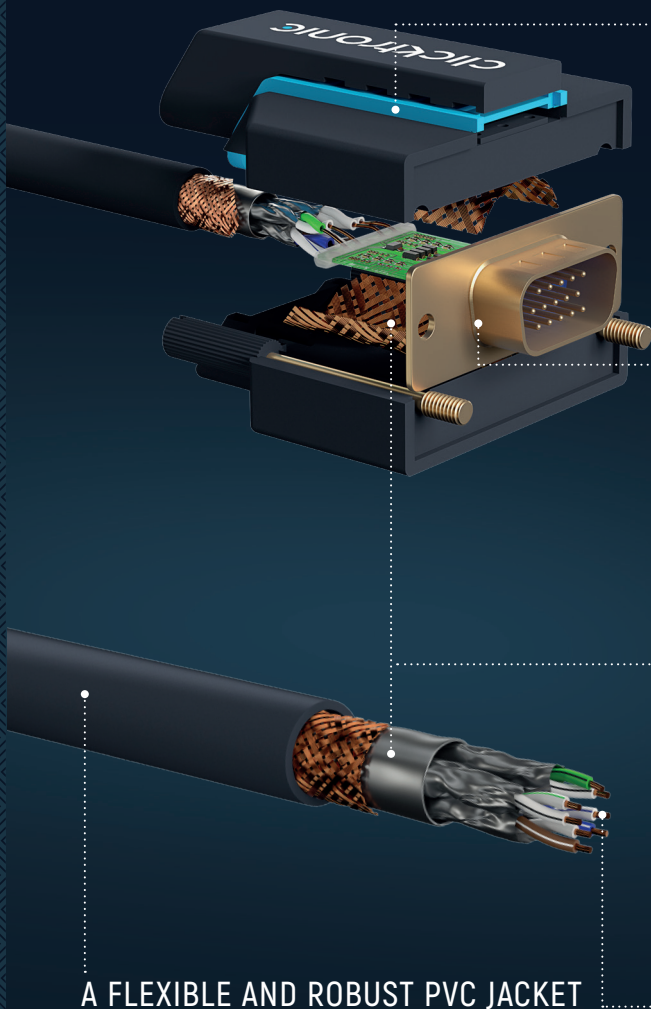

## A PLUG THAT PROTECTS AGAINST CABLE BREAKAGE

The plug of the Clicktronic VGA cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

## GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE

To make sure that the connectors remain rust-free, they are coated with 24 Carat gold. This prevents them from oxidising. Plus: unlike many materials, gold is excellent at transmitting signals – for resistance-free transmission, completely without any interruptions.

## TRIPLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the triple shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.


## OFC INNER CONDUCTORS FOR BRILLIANT SIGNAL QUALITY

Pin-sharp images – even after years: the inner conductors made from 99.9% oxygen-free copper (OFC) are designed not to come into contact with oxygen. This means that they do not oxidise and they transmit signals excellently, just like on the very first day.

## A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic VGA cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

# VGA CABLE

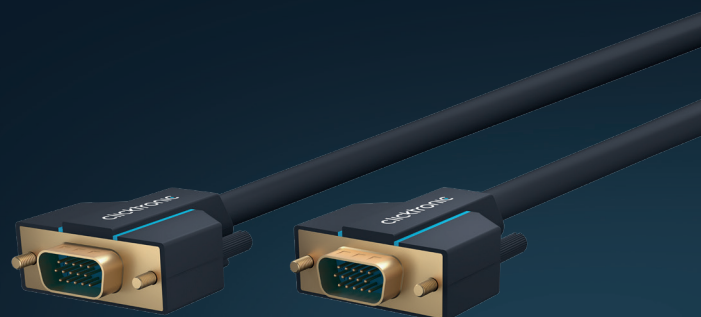

## HIGH RESOLUTION OVER UP TO 20 METRES

Smooth streaming, presenting and home cinema: The Clicktronic VGA cable allows you to transmit analogue video signals from gaming PC, notebook or console to screen, TV or projector – over 2 to 20 metres and with a resolution of up to FULL HD (1920 × 1080 px) at 60 Hz and SXGA (1280 × 1024 px) at 75 Hz.

## SECURE HOLD, OPTIMAL SIGNAL

Thanks to two screws, the VGA plug sits securely in the socket, the connection between all of the contacts is maintained perfectly and the transmission functions optimally – even when used with movable monitors. Simply loosen the screws to unplug the cable again.



INPUT



OUTPUT

## ALL ADVANTAGES AT A GLANCE

### HIGH RESOLUTION

Transmits analogue video signals with up to FULL HD (1920 × 1080 px) at 60 Hz and SXGA (1280 × 1024 px) at 75 Hz.

### SECURE HOLD

Sits securely in the socket thanks to two screws.

### BRILLIANT SIGNAL QUALITY

No oxidation thanks to an inner conductor made from 99.9% oxygen-free copper (OFC).

### NO FLICKERING

Thanks to triple insulation.

### FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

### STRONG PLUG

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

### RUST-FREE CONNECTOR

Even after years – thanks to a 24 Carat gold coating.


# VGA CABLE

## SIGNAL TRANSMISSION

TRANSMISSION TYPES: analogue video signals

WAVE IMPEDANCE ( $\Omega$ ): 75

## CABLE CROSS-SECTION

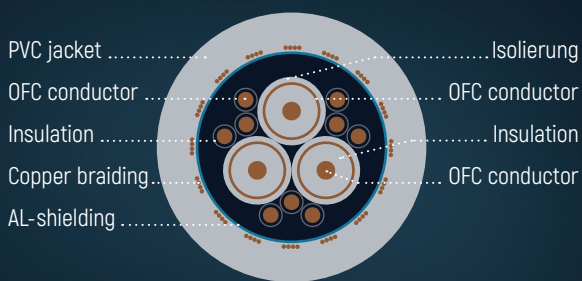

## SUPPORTED FORMATS

OTHER STANDARDS	FULL HD (1920 × 1080 px), SXGA (1280 × 1024 px), VGA (1024 × 768 px)
COLOUR SPACES	16 / 24 bit RGB / YUV

## PRODUCT DATA

CABLE LENGTH	Ø INNER CONDUCTOR	AWG	Ø OUTER JACKET	Ø FERRITE CORE
2 - 20 m	7 × 0.12 mm	28	8.0 mm	18 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
2.0 m	29.99 €	1 / 12 / 24	70351	4040849703515
3.0 m	34.99 €	1 / 12 / 24	70352	4040849703522
5.0 m	39.99 €	1 / 10 / 20	70353	4040849703539
10.0 m	49.99 €	1 / 8 / 16	70355	4040849703553
15.0 m	64.99 €	1 / 8	70357	4040849703577
20.0 m	79.99 €	1 / 8	70358	4040849703584



## CIRCUIT DIAGRAM

